

Technical data sheet



Item number	40771
Item type	M1/100 N/C black

Description


Mini fan MiniVent M1/100 black, with two speeds (90/75 m³/h) codable overrun and interval timer. Delayed start approx. 0, 45, 90 und 120 Sek., run on time is adjustable on approx. 6, 10, 15, 21 min, interval operation is adjustable on approx. 0, 8, 12, 24 hrs. The electronic functions are optionally on high or low speed adjustable. With the awarded design the MiniVent M1/100 N/C black integrates itself everywhere harmoniously, also in demandingly designed rooms. The compact and attractive designed facia avoids the view of the dirty fan opening completely. Equipped with airtight back draught shutter as standard. The noise level is 25 dB(A) at V = 75 m³/h due to the new ultraSilence technology. Universally applicable for the ventilation of bathroom, toilet and other small rooms.

Technical specifications


Artikelnummer	40771
Version	001
Artikeltype	M1/100 N/C black
Luftleistung freiblasend	90 m ³ /h
Nenn Drehzahl	2650 / 2250 min ⁻¹
Spannung	230 V , 1 ph , 50 Hz
Strom ungeregelt	0.06 / 0.04 A
Nennleistung	9 / 5 W
zul. Fördermitteltemperatur	40 °C
Schutzart IP	45
Nenn-Ø	100 mm
Gewicht	0.77 kg
Anschlussschemanr.	917
Lieferzeit	auf Anfrage

Technical data sheet

Head curve

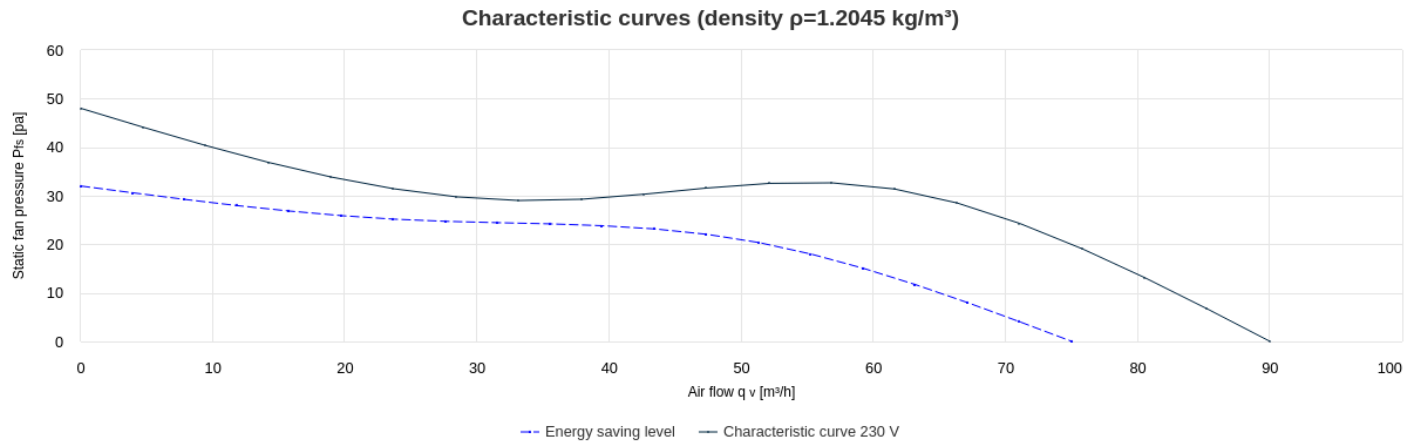


Dimensional drawing

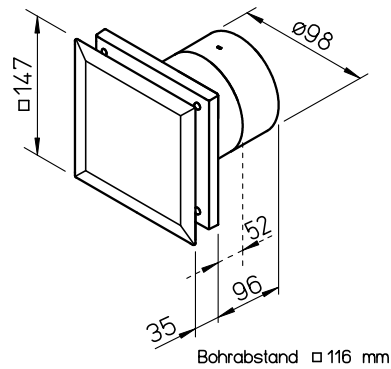




Wiring diagram

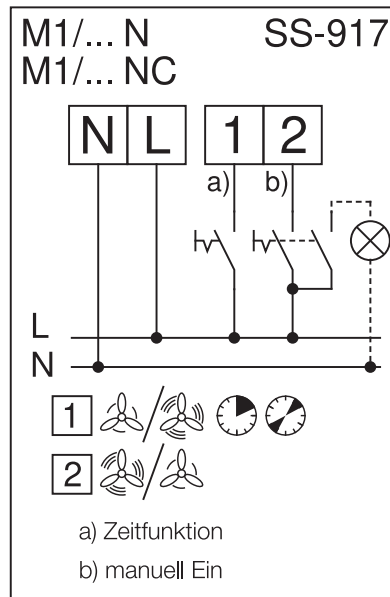Item number	40771
Item type	M1/100 N/C black
Connection diagram no.	917



Zubehör

	Best.-Nr.	Type	Bezeichnung
	00281	MBR 90 160 300	ADAPTING PLATE FOR TYP R 90 / HR 90
	00717	WES 90/100	
	06188	MF 100	SPACER FRAME FOR M1/100
	06352	TWH 90/100	Telescopic wall sleeve DN 100